


UWFC24BNNPRY

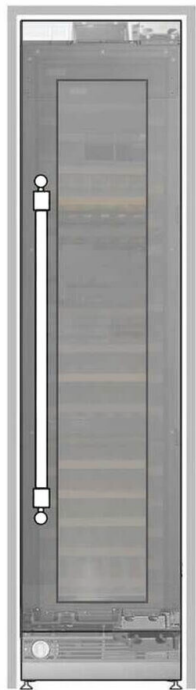

FEATURES & BENEFITS

- True Flush Installation with Hettich Hinges
- Metal Cooling with Stainless Steel Back Interior
- Customized LED Panel: Adjustable LED in each zone (White, Blue, Amber).
- Two-layer anti-UV resistant glass door helps you to preserve your UV-sensitive drinks.
- Reversible door allows you to choose between right or left swing for installation flexibility.
- Energy Star: Meets specific efficiency standard to show efficient energy usage which means cost saving and is more environmental friendly.

REFRIGERATOR FEATURES

Control Display	LED Electronic Touch Control
Automatic Defrost	Yes
Number of Shelves	14
Shelf Style	Beechwood with Optional Metal Trim
Number of Temp Zones	3
Feet Type	Telescopic Adjustable Feet
Hinge Type	Hettich Hinges
Interior Lighting	Adjustable LED in Each Zone (White, Blue, Amber)
Door Type	Two-Layer Anti-UV Resistant Glass Door
Door Alarm	Yes
Filter Type	Charcoal Filter
Available Modes	Demo Mode, Sabbath Mode

PERFORMANCE

Energy Star Qualified	Yes
Climate Class	SN.N.ST.T
Annual Energy Consumption	252 kWh/year
Refrigerant	R600a
Supply Voltage, V/Hz	110V - 50/60HZ
Rated Current, A	1.5
Noise Level, dBA	41

TEMPERATURE

Refrigerator Temp Range	F: 68° to 41° C: 20° to 5°
-------------------------	-------------------------------

COLOR OPTIONS

Stainless Steel	Available
Panel Ready	Yes

CONTROL

Cooling System	No Frost Cooling
Control System	Electronic Control


CAPACITIES

Total Net Vol.	100 Bottles (351L)
----------------	--------------------


DIMENSIONS & WEIGHT

Product Dimensions, HxWxD (Depth without door panel)	in: 83 ^{9/16} x 23 ^{3/4} x 23 ^{1/2} mm: 2123 x 603 x 597
Package Dimensions HxWxD	in: 90 ^{9/16} x 26 ^{3/4} x 26 ^{3/8} mm: 2300 x 667 x 670
40'HC Loading Quantity	51
Product Weight	247 lb; 112 kg
Min. Panel Thickness	in: 3/4 mm: 19

CABIN DIMENSIONS

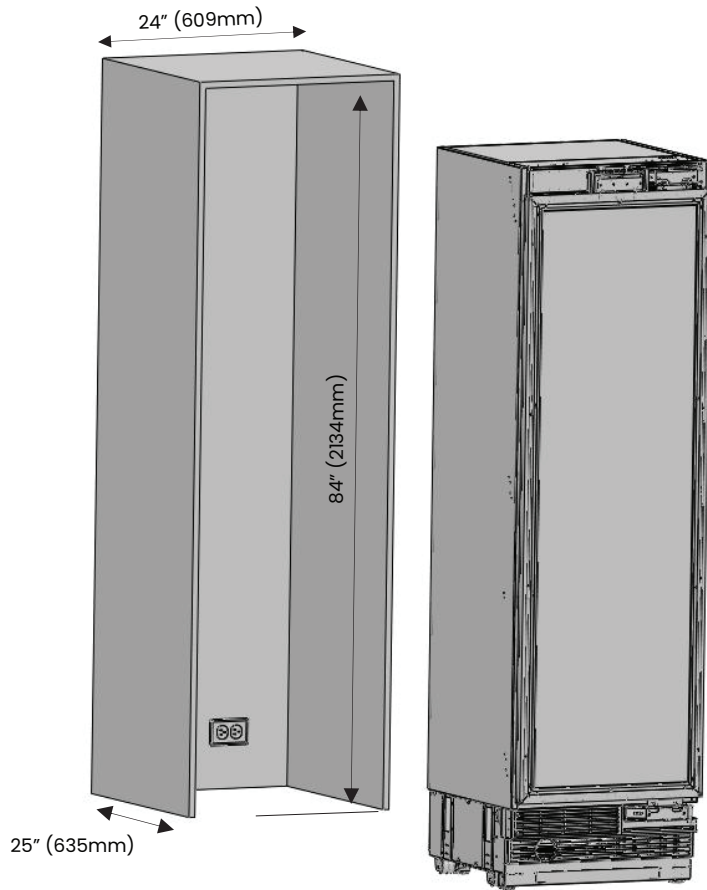


Location of the electrical wiring


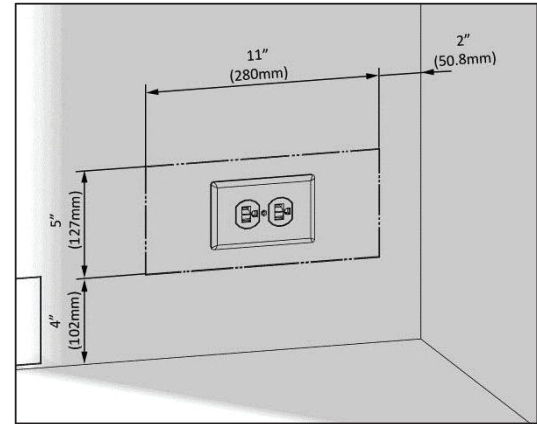


- Cabin dimensions below must be checked before starting the installation.

TOP VIEW CLERANCE

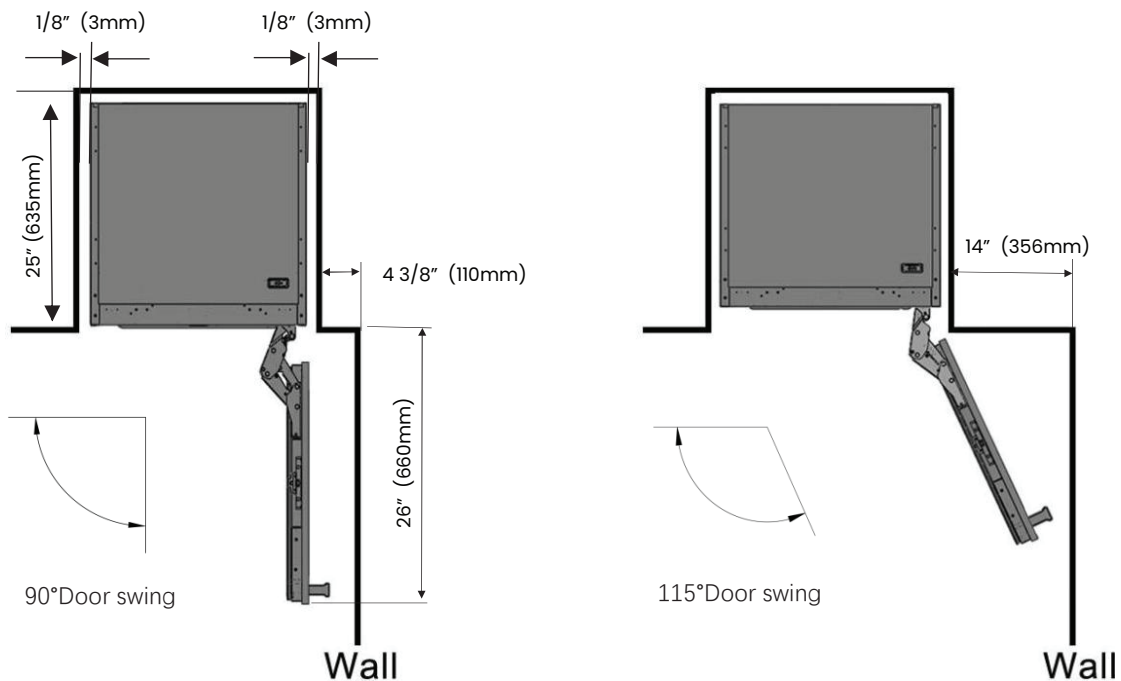

PRODUCT DIMENSIONS

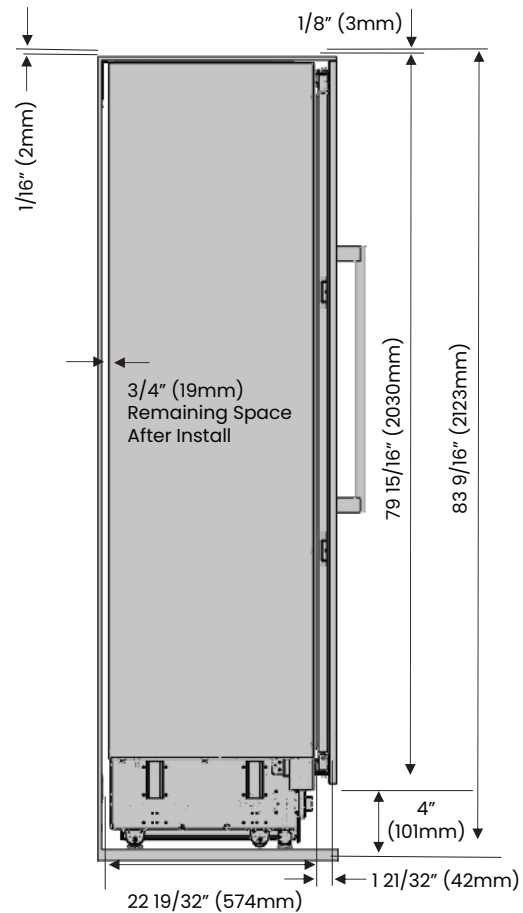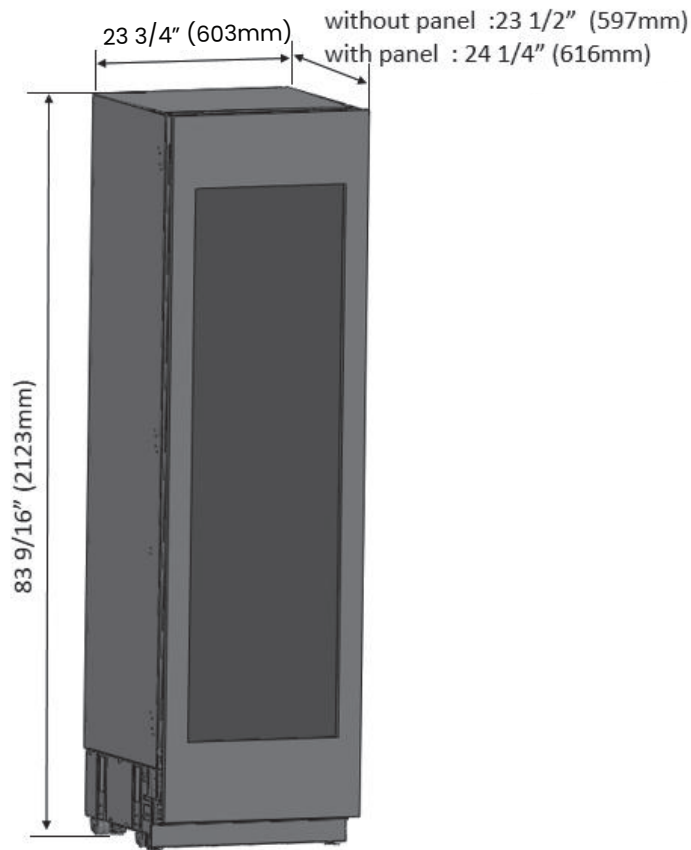

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to ILVE indicating the model number. Specifications are correct at time of printing. ILVE reserves the right to change product specifications or design without notice.