

 **ILVE** Live, Cook, Love.

## How to Install or Replace Handles on Your ILVE Majestic Range



### Replacing the Handles:

Upgrading your ILVE Majestic range handle is easier than you might think. Whether you're replacing a worn-out part or simply updating the look, this guide walks you through each step with clarity and care.

### Tools Required:

- 8mm Socket Wrench
- Phillips screwdriver
- Flat, padded surface to rest the oven door
- Gloves (optional but recommended)

# How to Install or Replace Handles on Your ILVE Majestic Range



## Step 1: Open the Oven Door


Set the door at a 90-degree angle. Unlock both hinges by pulling levers towards the door.

## Step 2: Remove the Oven Door

Carefully lift the oven door up and off the hinges. Place it on a soft, stable surface to prevent scratching or breakage.

## Step 3: Detach the Top Glass Retainer

Unscrew the two screws on either side of the top retainer. Lift and set the retainer aside.

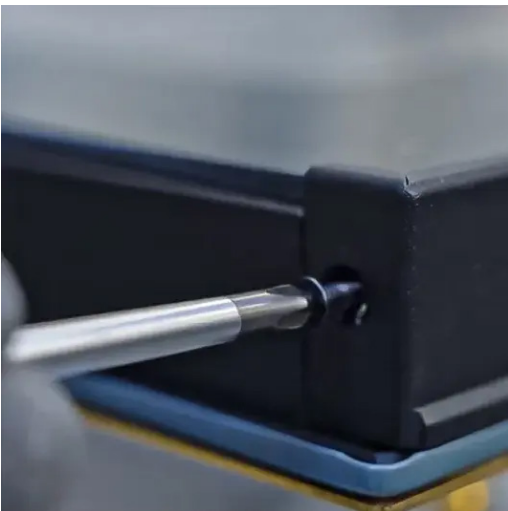


## Step 4: Remove the Glass Panels

Gently lift out the inner and middle glass panels. Handle them carefully to avoid damage.

## Step 5: Unscrew and Remove the External Glass Structure.

This exposes the oven handle. Set it aside on a protected surface.

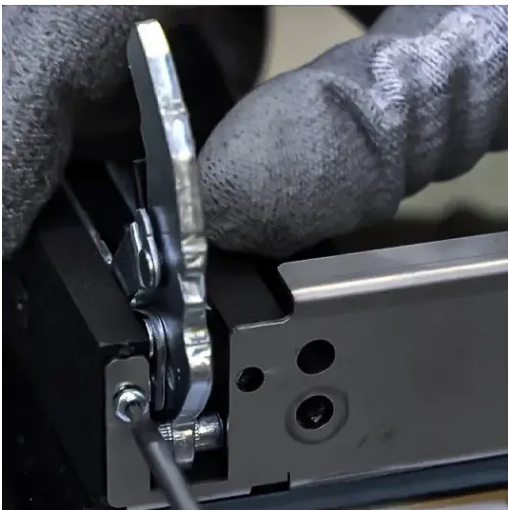

## Step 6: Remove the Existing Handle

Use an 8mm socket wrench to loosen both bolts. Detach the old handle.

## Step 7: Install the New Handle

Align and secure the new handle with the same 8mm wrench. Make sure it's tightened evenly on both ends.

## How to Install or Replace Handles on Your ILVE Majestic Range



### Step 8: Reattach the External Glass Structure

Line it up and screw it back into place securely.

### Step 9: Insert the Outer Glass Panel

Slide it carefully into position.

### Step 10: Reinsert the Middle Glass Panel

Ensure proper alignment within the internal supports.



### Step 11: Align the Clips

Double-check that the glass panels are properly held in place.

### Step 12: Double-Check the Middle Glass Panel

Make sure it's fully sealed and straight. Repeat if necessary.

### Step 13: Snap on the Top Glass Retainer

Press it gently into place over the glass.

### Step 14: Tighten the Retainer Screws

Secure the top retainer with the screws you removed earlier.

### Final Recommendations

- Refer to the full ILVE Installation Manual for clearance requirements and connection guidelines.
- Always hire a licensed professional for gas and electrical installations.
- Register your ILVE Range online to activate your warranty and receive product support.

Need further assistance? Visit [us.ilve.com](http://us.ilve.com) or contact our support team.